

## Portable Air Conditioners and Spot Coolers

SC.3.5 PAC



SC.30 Spot Cooler



SC.6.0 Spot Cooler



### COOLING AND HEATING SOLUTION'S RANGE OF EQUIPMENT:

- \* Air Cooled Heat Pump Chillers
- \* Commercial and Industrial Fan Coils
- \* LPHW Cast Iron Boilers
- \* Plate Heat Exchangers
- \* Water & Condensate Pumps
- \* Indirect Oil Fired Heaters
- \* Portable Air Conditioners
- \* Spot Coolers
- \* Portable Electric Heaters
- \* Fans and Ventilators
- \* Dehumidifiers
- \* Radiant Heaters
- \* dX Split Systems
- \* Air Handlers
- \* Building Dryers
- \* Bunded Fuel Tanks
- \* Road Certified Fuel Tanks
- \* Temperature Monitoring



**COOLING & HEATING SOLUTIONS**  
TEMPERATURE CONTROL SPECIALISTS

Marlwood House  
Silver Street  
Lymington  
Hampshire  
SO41 6DG  
UK


T. +44 (0) 1590 681 434  
E. [sales@candhs.co.uk](mailto:sales@candhs.co.uk)

W. [www.coolingandheatingsolutions.com](http://www.coolingandheatingsolutions.com)




Technical Information;

| Characteristics      |                     | Model Reference    |                    |                   |
|----------------------|---------------------|--------------------|--------------------|-------------------|
|                      |                     | SC.3.5             | SC.6.0             | SC.30             |
| Cooling Capacity     | kW/hr               | 3.5                | 6.1                | 30                |
| Moisture Removal     | Litres/hr           | 1.5                | 3.2                | 8.0               |
| Room Air Circulation | M <sup>3</sup> /hr  | 350                | 780                | 4,320             |
| Noise Level          | db                  | 50 at 1M           | 68 at 1M           | 68 at 1M          |
| Power Input          | kW                  | 230/1/50<br>1.5+/- | 230/1/50<br>2.4+/- | 400/3/50<br>20+/- |
| Thermostat           | °C                  | 18 to 31           | N/A                | 7 to 55           |
| Refrigerant          |                     | R290               | R407C              | R410A             |
| Heat Discharge Hose  | Dia. mm<br>Length M | 140<br>1.8         | 425<br>2.0         | n/a               |
| Air Outlet Hose      | LxWxH mm            | 180x125x125        | 300x250x250        | 700mm             |
| Unit Dimensions      | LxWxH mm            | 370x400x760        | 600x490x1300       | 1880x1080x2580    |
| Weight               | Kg                  | 27.4               | 86                 | 397               |

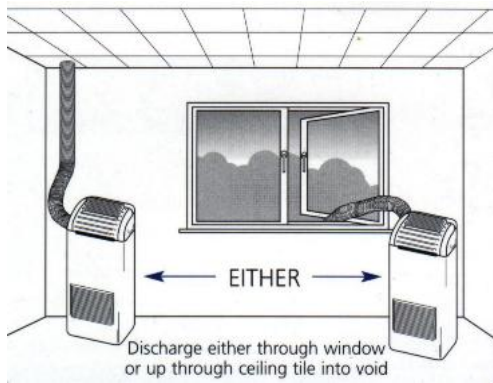

KY.35 - Installation Options

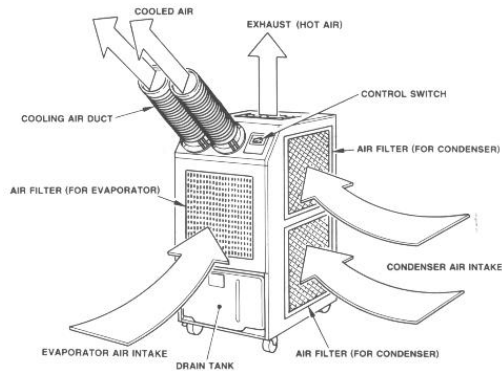

20.SF – How it works



COOLING & HEATING SOLUTIONS  
TEMPERATURE CONTROL SPECIALISTS

Marlowed House  
Silver Street  
Lymington  
Hampshire  
SO41 6DG  
UK

T. +44 (0) 1590 681 434  
E. [sales@candhs.co.uk](mailto:sales@candhs.co.uk)

W. [www.coolingandheatingsolutions.com](http://www.coolingandheatingsolutions.com)

