


## Frigaire Installed Air Conditioners

Outdoor Unit for 2.5-7.0kW  
dX Split (Outdoor Unit)



2.5-7.0kW dX Split  
(Indoor Unit)

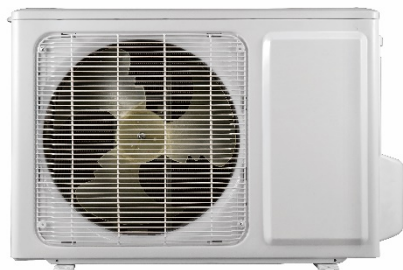

Y.15.dX Split  
(Indoor Unit)



Outdoor Unit for Y.15dX



### COOLING AND HEATING SOLUTION'S RANGE OF EQUIPMENT:

- \* Air Cooled Heat Pump Chillers
- \* Commercial and Industrial Fan Coils
- \* LPHW Cast Iron Boilers
- \* Plate Heat Exchangers
- \* Water & Condensate Pumps
- \* Indirect Oil Fired Heaters
- \* Portable Air Conditioners
- \* Spot Coolers
- \* Portable Electric Heaters
- \* Fans and Ventilators
- \* Dehumidifiers
- \* Radiant Heaters
- \* dX Split Systems
- \* Air Handlers
- \* Building Dryers
- \* Bunded Fuel Tanks
- \* Road Certified Fuel Tanks
- \* Temperature Monitoring



**COOLING & HEATING SOLUTIONS**  
TEMPERATURE CONTROL SPECIALISTS

Marlwood House  
Silver Street  
Lymington  
Hampshire  
SO41 6DG  
UK

T. +44 (0) 1590 681 434

E. [sales@candhs.co.uk](mailto:sales@candhs.co.uk)

W. [www.coolingandheatingsolutions.com](http://www.coolingandheatingsolutions.com)



## Technical Information;

Characteristics		Model Reference			
		2.5dX Split	3.5dX Split	7.0dX Split	15.0dX Split
Cooling Capacity	kW/hr	2.6	3.5	7.0	14.1
Power Supply	V/Ph/Hz	230/1/50	230/1/50	230/1/50	400/3/50
Cooling	Capacity (W)	2600	3500	7120	14000
	Rated Power (W)	805	1150	2750	5000
	Rated Current (A)	3.7	5.6	12.8	11
Heating	Capacity (W)	2800	3600	7600	15000
	Rated Power (W)	805	1150	2750	4800
	Rated Current (A)	3.7	5.3	12.8	10
Dehumidifying Capacity	L/h	1.1	Up to 2	Up to 3.5	Up to 7
Air Cycle Amount	M <sup>3</sup> /h	560	660	1150	1850
Noise Level (in/outdoor)	dB	39/26	42/26	48/39	52/62
Net Weight Indoor/Outdoor	Kg	9/28	10/29	17/53	55/110
Compressor			Hitachi/Rotary		Sanyo/Scroll
Refrigerant			R407C		
Product Dimension LxWxH (mm)	Indoor Unit	790x200x275	765x200x250	1090x227x325	600x360x1900
	Outdoor	776x320x540	765x260x525	865x372x732	900x350x1230
Package Dimension LxWxH (mm)	Indoor Unit	885x295x370	830x275x320	1173x320x425	685x482x2010
	Outdoor	870x415x635	925x350x615	1030x413x790	1025x435x1383
Applicable Area	M <sup>2</sup>	10-14	15-20	32-44	55-75

## Ancillaries;

### Condensate Pump



**COOLING & HEATING SOLUTIONS**  
TEMPERATURE CONTROL SPECIALISTS

Marlwood House  
Silver Street  
Lymington  
Hampshire  
SO41 6DG  
UK

T. +44 (0) 1590 681 434  
E. [sales@candhs.co.uk](mailto:sales@candhs.co.uk)

W. [www.coolingandheatingsolutions.com](http://www.coolingandheatingsolutions.com)

